




LED DOWNLIGHT

MODEL: EPI-DLR-24W

LED Downlight, Ideal for illumination and decoration at home and public areas.

OVERVIEW

- * High brightness with lifetime more than 25,000 hours.
- * New driver on board solution, cost effective.
- * Stable quality, fire-proof material.
- * Flicker-free, homogenous light.
- * Uniform light output, no yellowing, no dark zone.
- * Easy installation with fast connection.

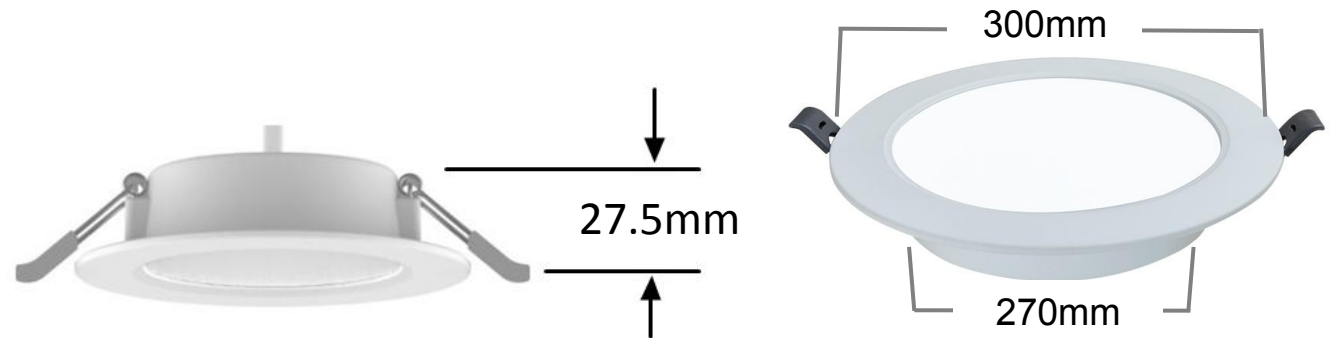

PHYSICAL DATA	
Dimension	D300*27.5 mm
Cutout Diameter	D275-285 mm
Lamp N.W.	342 g
LED Chip PCB	Aluminum
Material	PP Plastic + Aluminum + Lens
Installation	Recessed

ELECTRICAL DATA	
Wattage	24W
Power Factor	PF>0.5
Voltage	110VAC
Driver	Flicker-free
Output Efficiency	>90%
Surge Protection	1KV />2.5KV

OPTICAL DATA	
Lumen Flux	>2040LM
Lamp Efficacy	>85Lm/W
LEDs	SMD2835 (LM80)
CRI	>80
CCT	3000K /4000K /5000K /6500K
SDCM	<5
Beam Angle	120 Degree


LIFE DATA & OPERATING DATA	
Lifetime of Lamp	>25,000 hours (L70)
Lumen Maintenance	>90% after 2000 hours
Warranty	2 Years
Working Temperature	-15°C+50°C
Recommend Install Height	<3M

APPLICATION


Lighting area like the home lighting-living room, corridor, bedroom or commercial lighting-shopping mall, restaurant, cafe etc.




INSTALLATION

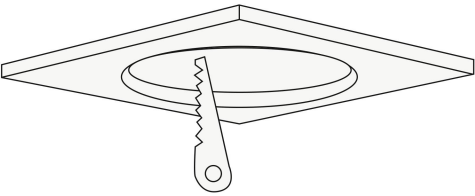


1 : Drill a hole on the ceiling

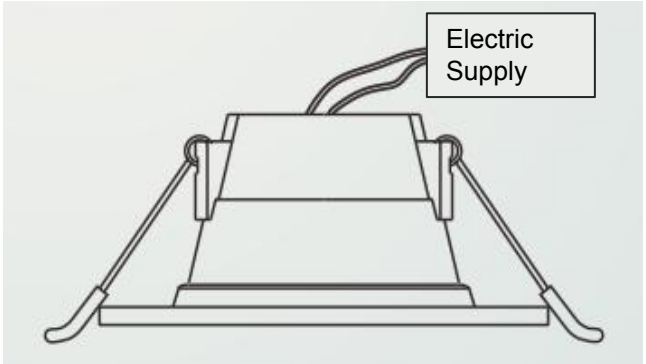

2: Connect to the power main line

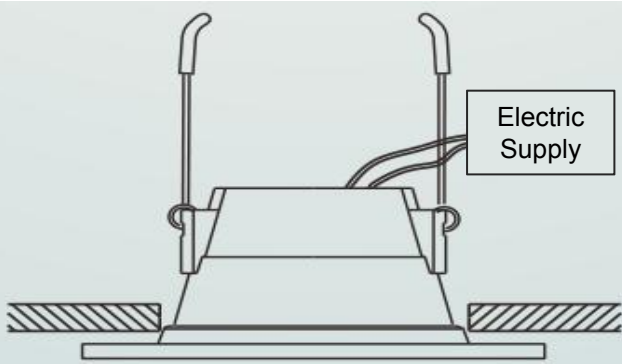

3: Press the buckle, upward install the lamp into the ceiling

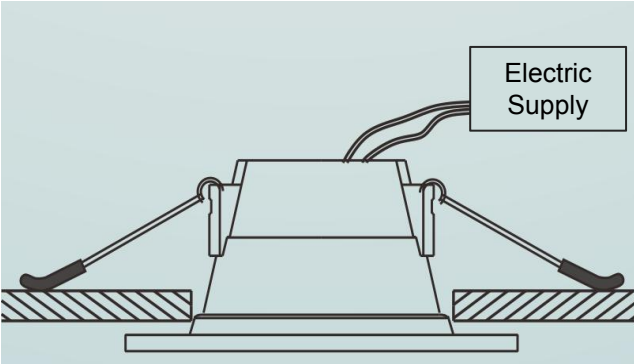

4: Fix the buckle and well finish the installation

PACKING

Watts	Lamp Size	QTY/CTN	Box Size	CTN Size	N.W./CTN	G.W./CTN	CBM
24W	Φ300*27.5 MM	20 PCS	303*31*303 MM	63*36.5*32.5 CM	6.84 KG	9.60 KG	0.075