## KOCOM®


# **COMBINED DOORPHONE**

#### KDP-602A/D MANUAL FOR OPERATION AND INSTALLATION

#### Features

- Can be used with direct interphone and doorphone
- Differentiated call signal to rooms and door station
- Used : home,office,apartment,factory,hospital etc.
- Can be combined with door opener.
- Can be used 1:1interphone


Thank you very much for purchasing KOCOM Doorphone. please read this manual thoroughly to ensure correct usage, before operation

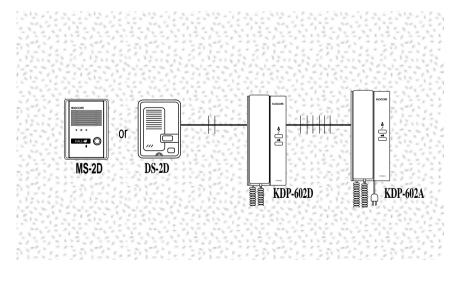


KOCOM CO.,LTD.

### KOCOM CO.,LTD.

KDP-602A/D 04.06

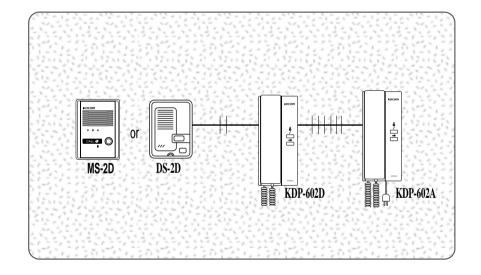

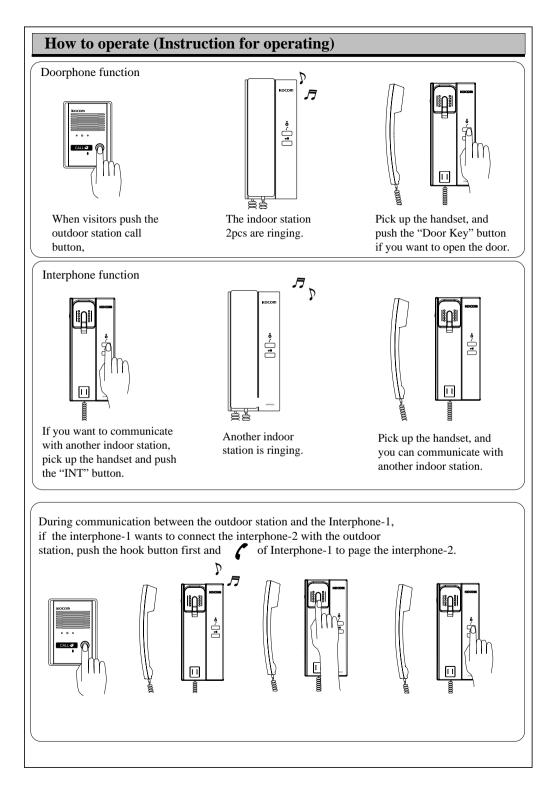

#### Warranty



#### To receive after sales service, have the followings ready when you contact our branches

- 1. Name of the product
- 2. Model number of the product
- 3. The area of problem
- 4. Phone number and address at
- which you can be contacted.

#### Warranty Card

PRODUCT	
MODEL	
DATE PURCHASED	
WARRANTY PERIOD	
AGENCY	
AGENCY ADDRESS	

**• KOCOM** Warranties the original purchaser of the product as follows.

- 1) This product is produced under strict quality control and inspection procedures.
- 2) If this product breaks down during proper use as a result of product defect, KOCOM will repair it within one year from date of purchase free of charge.
- 3) The following cases will be subject to charge, even during warranty period:
  - a. Breakdown during transport, or through careless treatment, by consumer.
  - b. Breakdown caused by unauthorized repair, or system modification.
  - c. Breakdown caused by natural disaster or power disorder.

#### **Precautions for Operation** As this device consists of precise electronic components, and high voltage is generated internally, do not attempt to disassemble. When cleaning, never use wet Do not drop Indoor or outdoor station, and avoid strong impact. hands, volatile benzene or paint Ê thinner. Keep away from humidifier and Maintain the product clean by stove. High temperature and frequently wiping outdoor with humidity can cause malfunction soft cloths Name of Each Part **Indoor Station Out door Station** MS-2D DS-2D Volume Switch Power Lamp (KDP-602D) Speaker **1** Call Button . . . CALL & Call Button Door open Handset C-Mic ŝ ŝ **Specifications** Description **KDP-602A** AC 220V or AC110V Electric source Consumption UN LOAD: 1.3W, IN LOAD: 4W Signal Sound From door : chime , From indoor : Electronic Chime Wiring Door : 2Wired, Room : 6Wired Range KDP-602A ◀ ► KDP-602D = 30m KDP-602A or KDP-602D $\checkmark$ MS-2D or DS-2D = 50m Component • Master station for Indoor-use • Substation for Outdoor-use • Wall hanger for master station

#### Wiring Diagram

Wiring diagram of between two Indoor stations and DS-2D outdoor station

